BLACKMER PARTS LIST

960401 Page 1 of 2


PARTS LIST 501-A01

DISCONTINUED PUMP MODELS:

LGF1D, LGB1D, LGF1PD, LGB1PD, LGF1C, LGB1C, LGF1PC, LGB1PC Keep with Instructions 501-A00 for Installation, Operation and Maintenance Section 501 Effective Mar Replaces Sep

Mar 2011 Sept 2003

Discontinued models; parts availability may be limited

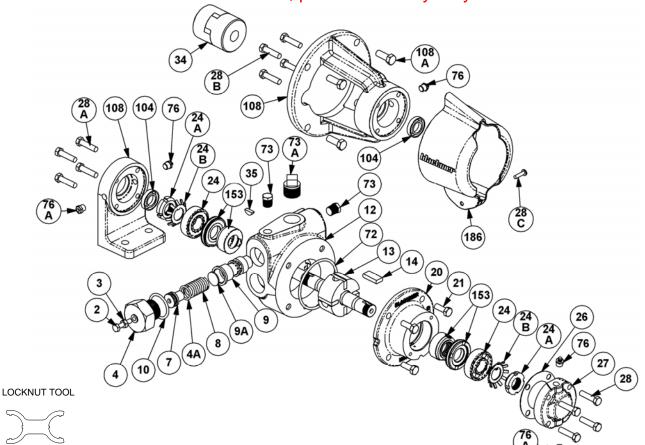

Ref. No.	Description	Parts per Pump	Part No.	Ref. No.	Description	Parts per Pump	Part No.	
2	Adjusting Screw – Relief Valve (R/V)	1	432901	28 [†]	Capscrews – Bearing Cover	4	920080	
3	Locknut – Adjusting Screw	1	922811	28A [†]	Bracket Mounting Screws	4	920090	
4	Cover – R/V	1	412901	28B [†]	Bracket Mounting Screws	4	920101	
4A	O-Ring – Spring Guide	1	¹ 711940	28C	Guard Screw	1	920026	
7	Spring Guide – R/V	1	422901		Coupling Half – Pump		906150	
8	Spring – R/V	1	472901	472901 34 Coupling Half – Motor (56C)		1	906151	
9	Valve – R/V	1	452901		Coupling Half – Motor (143-145TC/184C)	1	906147	
9A	Disc – R/V	1	442901		Coupling Spider		906155	
10	O-Ring – R/V Cover	1	¹ 701965	35	Key – Shaft	1	¹ 909126	
12 [†]	Cylinder – LGF1, LGB1	- 1	022914	72	O-Ring – Head	1	¹ 711941	
12	Cylinder – LGF1P, LGB1P		022915	73	Gage Plug (1/4")	2	908198	
13	Rotor & Shaft Assembly, Four Vane ²	4	262901	73A [†]	Gage Plug (3/4")	1	908225	
13	(Includes Ref. Nos. 24A & 24B)	1	262901	76	Grease Fitting	2	317815	
14	Vane – Duravane (Std.) ³	4	¹ 092913	76A	Grease Relief Fitting	2	701992	
20 [†]	Head	1	032905	104	Grease Seal	1	¹ 331934	
21	Capscrews – Head	4	920178	920178 Bracket - (base mount) - LGB1(P)D		1	832913	
24	Ball Bearing	2	1 903405		Bracket (C-faced footless) - LGF1(P)D	I	832912	
24A	Locknut – Bearing	2	903531	108A	Capscrews – Bracket	4	920331	
24B	Lockwasher – Bearing	2	¹ 903532	108B	Bracket (C-faced footed)		SEE PAGE 2	
26 [†]	Gasket – Bearing Cover	1	¹ 383075	186	Guard	1	804120	
27 [†]	Bearing Cover	1	043071		Tool - Locknut		903090	
					Kit – Maintenance (4-Vane)		898916	


¹ Included in Maintenance Kit.

³ Later version 'E' pumps use a 6-vane rotor (pn 262907) that is fully interchangeable as long as the slotted vanes (pn 092913) are used. ³ The current slotted vanes (pn 092913) may be used in either the 6-vane or 4-vane rotors. Always install the vanes with the slot facing the direction of rotation.

direction of rotation. [†] To fit the LGB1(P)C, LGF1(P)C use: Ref. No. 12-022902/022911 respectively, Ref. No. 20-032902, Ref. No. 26-382901, Ref. No. 27-042901, Ref. No. 28-920203, Ref. No. 28A & B-920230, Ref. No. 73A-908198, and Ref. No.108-832901/832905 respectively. MECHANICAL SEAL


Ref. No.	Part Name	Parts Per Pump	Part No.
153	Mechanical Seal Assembly	2	¹ 332920
153A**	Jacket Assembly – Seal	2	**
153B**	Stationary Seat (Steel)	2	**
153D	O-Ring – Stationary Seat (Buna-N)	2	711916
153F**	Seal Face (Carbon)	2	**
153G	O-ring – Rotating (Buna-N)	2	711939

¹ Included in Maintenance Kit ** Ref. Nos. 153A, 153B & 153F are no repair parts.



MOUNTING BRACKET

Ref. No.	Part Name	Parts Per Pump	Part No.
108B	Bracket (C-faced footed) – LGF1(P)D Bracket (C-faced footed) – LGF1(P)C	1	833000 832905





1809 Century Avenue, Grand Rapids, Michigan 49503-1530, U.S.A. Telephone: (616) 241-1611 / Fax: (616) 241-3752 E-Mail: blackmer@blackmer.com / Internet: www.blackmer.com