

COMPARISON CENTRAL: WILDEN vs. MURZAN

Wilden® Saniflo™ Hygienic Series with Pure-Fuse Diaphragm vs. Murzan

Murzan publishes minimal data regarding the performance of their pumps. Because of this, Wilden® conducted a head-to-head test in its test lab, which is setup in accordance to the Hydraulic Institute's testing standards. The test pitted Murzan's 76 mm (3") pump against the Wilden 76 mm (3") **Pro-Flo® SHIFT Saniflo™ Hygienic Series (HS)**

Pump with Pure-Fuse Diaphragms. Murzan and Wilden were tested under identical application conditions. At all data points – from an air inlet of (40 psig with 0 psig discharge) to an air inlet of (120 psig with 90 psig discharge) – the Wilden HS pump outperforms Murzan's pump both in product yield and air consumption.



NOTE: Information based on published data for the 76 mm (3") Pro-Flo SHIFT Saniflo Hygienic Series (HS) pump vs. Murzan for 5.52 bar air inlet at 0.69 bar discharge pressure (80 psig air inlet at 10 psig discharge pressure)

CLEANABILITY CHALLENGE:


The unique design of Wilden Saniflo HS pumps incorporates a free-draining flow path that optimizes performance and enables clean-in-place (CIP) capability while allowing the pump to meet all 3A requirements. It is by design that the HS pump does not have any catch areas for product to remain inside the pump. Catch areas can create potential bacteria growth, contaminating the product.




DON'T BELIEVE US? FLIP OVER TO SEE THE DATA!

WILDEN®


COMPARISON CENTRAL: WILDEN vs. MURZAN

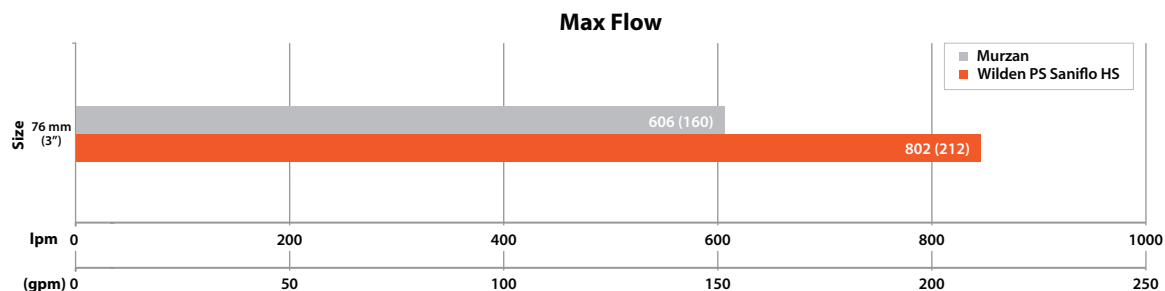

BENEFITS: Wilden PS Saniflo HS pumps have a higher flow rate than Murzan pumps! PS Saniflo HS pumps can pump more product, increasing plant productivity!

	DATA POINTS	WILDEN PS SANIFLO HS		MURZAN		% MORE PRODUCT YIELD	% LESS AIR CONSUMED
		lpm (gpm)	Nm ³ /h (scfm)	lpm (gpm)	Nm ³ /h (scfm)		
EFFICIENCY 	4.14 bar air inlet @ 1.38 bar discharge pressure (60 psig air inlet @ 20 psig discharge pressure)	458 (121)	77 (48)	386 (102)	83 (52)	19%	8%
	5.52 bar air inlet @ 0.69 bar discharge pressure (80 psig air inlet @ 10 psig discharge pressure)	670 (177)	104 (65)	500 (132)	117 (73)	34%	11%
	5.52 bar air inlet @ 3.45 bar discharge pressure (80 psig air inlet @ 50 psig discharge pressure)	322 (85)	87 (54)	276 (73)	91 (57)	16%	5%
	6.89 bar air inlet @ 1.38 bar discharge pressure (100 psig air inlet @ 20 psig discharge pressure)	632 (167)	130 (81)	500 (132)	149 (93)	27%	13%
	8.27 bar air inlet @ 2.07 bar discharge pressure (120 psig air inlet @ 30 psig discharge pressure)	613 (162)	159 (99)	488 (129)	186 (116)	26%	15%

BENEFITS: Wilden PS Saniflo HS pumps increase product yield while requiring less air to power the pump – increasing energy savings and plant productivity!

	DATA POINTS	WILDEN PS SANIFLO HS	MURZAN	WILDEN ANNUAL SAVINGS
ANNUAL OPERATING COST* (USD) 	4.14 bar air inlet @ 1.38 bar discharge pressure (60 psig air inlet @ 20 psig discharge pressure)	\$1,232	\$1,334	\$102
	5.52 bar air inlet @ 0.69 bar discharge pressure (80 psig air inlet @ 10 psig discharge pressure)	\$1,983	\$2,227	\$244
	5.52 bar air inlet @ 3.45 bar discharge pressure (80 psig air inlet @ 50 psig discharge pressure)	\$1,647	\$1,739	\$92
	6.89 bar air inlet @ 1.38 bar discharge pressure (100 psig air inlet @ 20 psig discharge pressure)	\$2,808	\$3,223	\$415
	8.27 bar air inlet @ 2.07 bar discharge pressure (120 psig air inlet @ 30 psig discharge pressure)	\$3,795	\$4,446	\$651

* Assumptions: Annual Operating Cost (USD) is calculated assuming that the pumps are operating at 8 hours a day, 5 days a week, totaling to 2,080 hours of operation per year at 10 cents per kilowatt hour.



Order Online

WILDEN®

PSG

22069 Van Buren Street, Grand Terrace, CA 92313-5651

P: +1 (909) 422-1730 • F: +1 (909) 783-3440

wildenpump.com

Authorized PSG® Partner: